Operating Instructions



Bluestreak Equipment 1645 Hwy #3, Delhi Ontario, Canada N4B2W6


Caiman Operating Instructions



STEP 1 CONNECT SWEEPER

Connect the Caiman magnetic sweeper to the tow vehicle with the 2" ball coupler and safety chains.

You must use a 2"Trailer ball, unless you purchased an optional Pintle Ring.

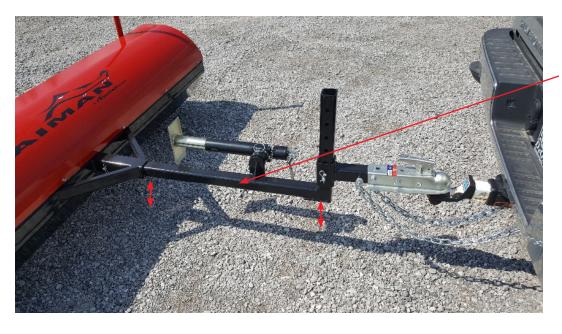

STEP 2 KEEP THE TONGUE LEVEL

Keep the tongue level. The tongue of the magnetic sweeper should be as level with the ground as possible. It can be adjusted by changing the vertical position of the coupler on the trailer tongue or by changing the height of the ball mount on the tow vehicle.





STEP 3 ADJUST SWEEPING HEIGHT

Adjust the sweeping height (distance from ground to bottom of sweeper) between 2" and 6". The lower the better, but make sure magnet is not constantly hitting the ground.

Tighten nut on top link to ensure sweeping height doesn't change using a 1-1/8"Wrench



STEP 4 COLLECT DEBRIS

Drive the tow vehicle around towing the Caiman magnetic sweeper and collect metal debris.





STEP 5 CLEAN OFF DEBRIS

Clean the metal debris off of the Caiman magnetic sweeper by first stopping the tow vehicle.

Push Down on one of the Spring Assisted Debris Release Handles until the handle stays in the down position.

The Metal Debris will Release from the magnet and drop to the ground under the magnetic sweeper.

Repeat for opposite side.



STEP 6 MOVE SWEEPER FORWARD

Pull the magnetic sweeper forward with the tow vehicle to expose the metal debris that dropped from the magnet. Dispose of the metal debris.



STEP 7

RETURN DEBRIS RELEASE HANDLES TO UPRIGHT POSITION

Return the Spring Assisted Debris Release Handles to upright position and continue to pick up metal debris.

Caiman Parts

All parts are available for the Caiman magnetic sweeper from your dealer or directly from Bluestreak Equipment at: www.bluestreakequipment.com

Caiman Video Resources

All Caiman Operating Instructions are available in video format online at www.bluestreakequipment.com



